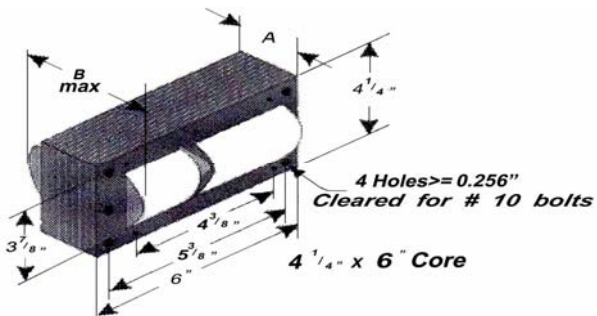
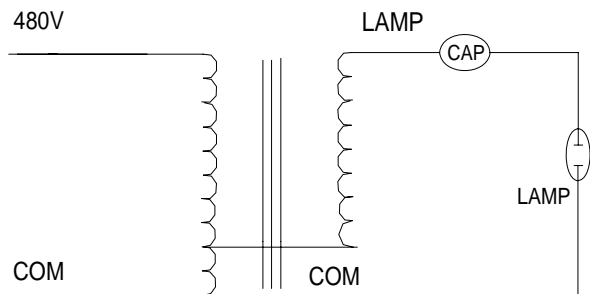



Atlas Lighting Supply
 2828 S. Linwood St
 Visalia, CA 93277
 Ph: 559-697-6764, F: 888-605-2324
 www.atlaslightingsupply.com

E-BAL-H1000-A4860N	
Ballast Type	Metal Halide
Lamp	1000W M47
Circuit Type	CWA
Input Frequency	60HZ

Model_No:	E-BAL-H1000-A4860N			Capacitor (Required)			
Input Voltage	480			Capacitance	24uF±3%		
Operating Current	2.2			Minimum Volts	480V		
Open Circuit Current	1.2			Dry	Diameter	2.87"	
Starting Current	5.7				Height	5.3"	
CCF (*ANSI≤1.8)	1.8			Case Max. Temperature			100°C
Short Circuit Current	Secondary	5.7		Ignitor (Not Required)			
	Input	2.3		Ignitor Model			
Recommended Fuse	6			Pulse Height(kV)			
Input Voltage At Lamp Dropout				Pulse Width (≥u S)			
UL 1029 Bench Top Rise	D						
OCV(Min.)	440						
Input Power	1080W						
Power Factor	≥90%						
Regulation	Line Volts	±10%					
	Lamp Watts	±10%					
Insulation System	Class H, 180°C						
Ballast Dimension	A	2.84"					
	B	4.57"					
Ballast Net Weight	19.2 lbs						
Leads	12"-Cross Link Polyolefin			Min.Starting Temp.	-20°F / -30°C		

Ballast Dimension	Wiring Diagram
 <p>4 1/4" X 6" Core</p> <p>4 Holes ≥ 0.256" Cleared for # 10 bolts</p> <p>Dimensions: 3 7/8", 4 3/8", 5 3/8", 6", 4 1/4", 4 1/4", B max</p>	 <p>480V</p> <p>COM</p> <p>LAMP</p> <p>CAP</p> <p>LAMP</p> <p>COM</p>
	<p>Capacitor</p>  <p>Dimensions: 5.3", 4.8", 2.87", 1.8"</p>

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.