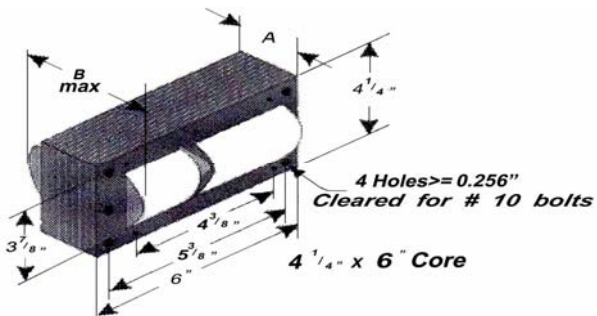
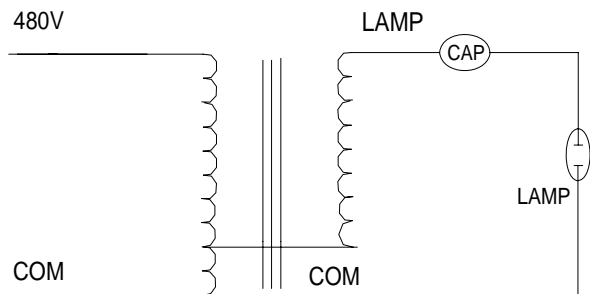
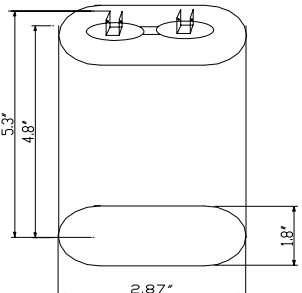


Atlas Lighting Supply  
 2828 S. Linwood St  
 Visalia, CA 93277  
 Ph: 559-697-6764, F: 888-605-2324  
 www.atlaslightingsupply.com

E-BAL-H1500-A4860N	
Ballast Type	<b>Metal Halide</b>
Lamp	<b>1500W M48</b>
Circuit Type	<b>CWA</b>
Input Frequency	<b>60HZ</b>

Model_No:	E-BAL-H1500-A4860N			Capacitor (Required)		
Input Voltage	480			Capacitance	32uF±3%	
Operating Current	3.4			Minimum Volts	525V	
Open Circuit Current	0.8			Dry	Diameter	2.87"
Starting Current	8.2				Height	5.3"
CCF (*ANSI≤1.8)	1.8			Case Max. Temperature		100°C
Short Circuit Current	Secondary	8.2		Ignitor (Not Required)		
	Input	3.4		Ignitor Model		
Recommended Fuse	10			Pulse Height(kV)		
Input Voltage At Lamp Dropout				Pulse Width (≥u S)		
UL 1029 Bench Top Rise	E					
	OCV(Min.)	440				
	Input Power	1625W				
	Power Factor	≥90%				
Regulation	Line Volts	±10%				
	Lamp Watts	±10%				
Insulation System	Class H, 180°C					
Ballast Dimension	A	4.2"				
	B	6.2"				
Ballast Net Weight	27.5 lbs					
Leads	12"-Cross Link Polyolefin			Min.Starting Temp.	-20°F / -30°C	

Ballast Dimension	Wiring Diagram
 <p>4 Holes ≥ 0.256" Cleared for # 10 bolts</p> <p>4 1/4" X 6" Core</p>	 <p>480V</p> <p>COM</p> <p>LAMP</p> <p>CAP</p> <p>LAMP</p> <p>COM</p>
	<p>Capacitor</p>  <p>5.3"</p> <p>4.8"</p> <p>2.87"</p> <p>1.8"</p>

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.