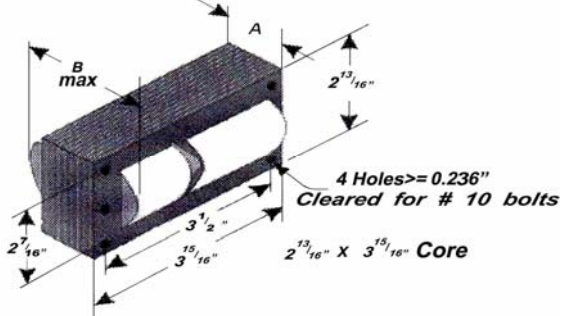
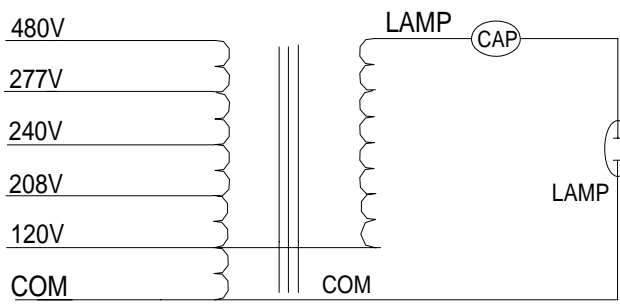
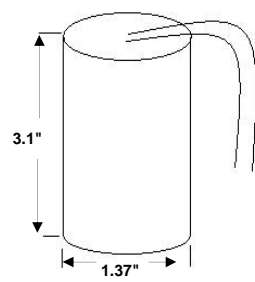


Atlas Lighting Supply

2828 S. Linwood St
 Visalia, CA 93277
 Ph: 559-697-6764, F: 888-605-2324
 www.atlaslightingsupply.com

E-BAL-H017M5	
Ballast Type	Metal Halide
Lamp	175W M57
Circuit Type	CWA
Input Frequency	60HZ

Model_No: E-BAL-H017M5							Capacitor (Required)		
Input Voltage		120	208	240	277	480	Capacitance	10uF±3%	
Operating Current		1.9	1.1	1.0	0.8	0.5	Minimum Volts	400V	
Open Circuit Current		2.4	1.4	1.2	1.1	0.6	Dry	Diameter	1.37"
Starting Current		1.6	1.6	1.6	1.6	1.6		Height	3.1"
CCF (*ANSI≤1.8)		1.8	1.8	1.8	1.8	1.8	Case Max. Temperature		100°C
Short Circuit Current	Secondary	1.9	1.9	1.9	1.9	1.9			
	Input	0.6	0.4	0.4	0.3	0.2			
Recommended Fuse		5	3	3	2	2			
Input Voltage At Lamp Dropout									
UL 1029 Bench Top Rise		D	C	C	C	C			
OCV(Min.)		275					Ignitor (Not Required)		
Input Power		202W					Ignitor Model		
Power Factor		≥ 90%					Pulse Height(KV)		
Regulation	Line Volts	±10%					Pulse Width (≥ u S)		
	Lamp Watts	±10%							
Insulation System		Class H, 180°C							
Ballast Dimension	A	2.5"							
	B	4.1"							
Ballast Net Weight		8.0 lbs							
Leads		12"-Cross Link Polyolefin					Min. Starting Temp. -20°F / -30°C		

Ballast Dimension	Wiring Diagram
 <p>Diagram showing ballast dimensions: A, B max, 2¹³/₁₆" height, 4 Holes ≥ 0.236" Cleared for # 10 bolts, 3¹/₂" length, 3¹⁵/₁₆" width, 2¹³/₁₆" X 3¹⁵/₁₆" Core.</p>	 <p>Wiring diagram showing input voltages (480V, 277V, 240V, 208V, 120V, COM) connected to a transformer. The secondary winding is connected to a LAMP, a CAP (capacitor), and another LAMP. The common terminal (COM) is also shown.</p>
	Capacitor
	 <p>Diagram of a cylindrical capacitor with a diameter of 1.37" and a height of 3.1".</p>

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.