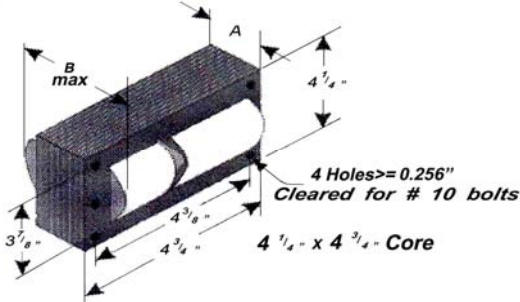
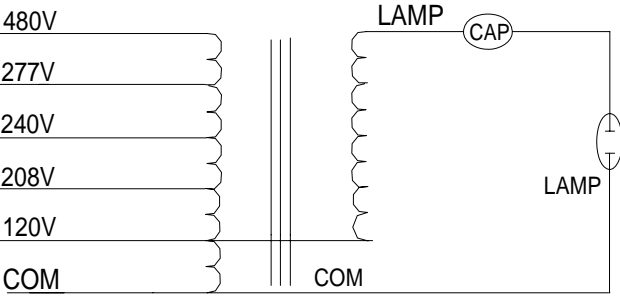
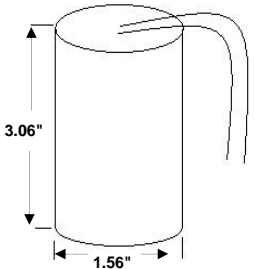


Atlas Lighting Supply

2828 S. Linwood St
 Visalia, CA 93277
 Ph: 559-697-6764, F: 888-605-2324
 www.atlaslightingsupply.com

E-BAL-H025M5	
Ballast Type	Metal Halide
Lamp	250W M58
Circuit Type	CWA
Input Frequency	60HZ

Model_No: E-BAL-H025M5							Capacitor (Required)			
Input Voltage		120	208	240	277	480	Capacitance	15uF±3%		
Operating Current		2.6	1.5	1.4	1.1	0.7	Minimum Volts	400V		
Open Circuit Current		1.8	1.1	1.0	0.8	0.5	Dry	Diameter	1.56"	
Starting Current		2.4	2.4	2.4	2.4	2.4		Height	3.06"	
CCF (*ANSI≤1.8)		1.8	1.8	1.8	1.8	1.8	Case Max. Temperature		100°C	
Short Circuit Current	Secondary	2.8	2.8	2.8	2.8	2.8				
	Input	2.0	1.2	1.0	0.9	0.6				
Recommended Fuse		8	5	5	3	2				
Input Voltage At Lamp Dropout										
UL 1029 Bench Top Rise		A	A	B	A	B				
	OCV(Min.)	270								
	Input Power	290W								
	Power Factor	≥90%								
Regulation	Line Volts	±10%								
	Lamp Watts	±10%								
Insulation System		Class H, 180°C								
Ballast Dimension	A	1.6"								
	B	3.1"								
Ballast Net Weight		10.0 lbs								
Leads		12"-Cross Link Polyolefin					Min.Starting Temp.	-20°F / -30°C		

Ballast Dimension	Wiring Diagram
 <p>Diagram showing ballast dimensions: A, B max, 4 1/4", 3 7/8", 4 3/4", 4 3/4", 4 1/4" x 4 3/4" Core. 4 Holes ≥ 0.256" Cleared for # 10 bolts.</p>	 <p>Wiring diagram showing connections for 480V, 277V, 240V, 208V, 120V, and COM. Includes LAMP, CAP, and another LAMP connection.</p>
	Capacitor
	 <p>Diagram of a capacitor with dimensions: 3.06" height and 1.56" diameter.</p>

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.