

Back to Atlas Lighting Supply



35 to 150 watts MH | HPS

### FEATURES

- Die Cast Aluminum Housing
- 1/2" Threaded Knuckle
- One Piece Aluminum Reflector
- Suitable for Ground Mounting
- Hinged Face Frame
- Tempered Glass Lens
- Lamp Included

### ORDERING INFORMATION

Catalog #	Description	Volts	Ballast Type	Lamp
<b>METAL HALIDE</b>				
FL-50MHQPK	50 watt MH	Quad V	HX-NPF	MH50/U/M
FL-70MHQPK	70 watt MH	Quad V	HX-NPF	MH70/U/M
FL-100MHQPK	100 watt MH	Quad V	HX-NPF	MH100/U/M
<b>HIGH PRESSURE SODIUM</b>				
FL-35HPK	35 watt HPS	120 V	R-NPF	C35S76/M
FL-50HPK	50 watt HPS	120 V	R-NPF	C50S68/M
FL-70HPK	70 watt HPS	120 V	R-NPF	C70S62/M
FL-100HPK	100 watt HPS	120 V	R-NPF	C100S54/M
FL-150HPK	150 watt HPS	120 V	R-NPF	C150S55/M


Add Suffix WT to Indicate White Housing

### ACCESSORIES (FIELD INSTALLED)

Catalog #	Description	Finish	Std. Pkg.	See Pg.#
210-001	FL Face Frame Assembly	Bronze	1	79
210-001WT	FL Face Frame Assembly	White	1	79
320-019	Glare Shield for FL	Bronze	1	79
320-019WT	Glare Shield for FL	White	1	79
320-022	Wireguard for FL	—	1	79


### DIMENSIONS

Approx. Weight: 10 lbs.

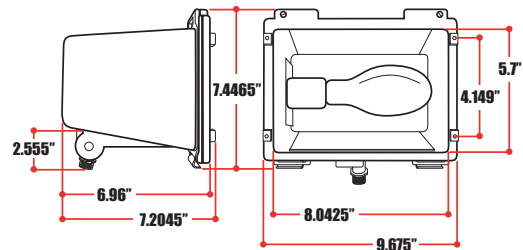

### PHOTOMETRICS

100W MH @ 15' Mounting Height  
and Aimed 45° below horizontal  
Isofootcandles



### MOUNTING DETAIL

