

Back to Atlas Lighting Supply

### FEATURES

- Uses Standard Size Lamp
- Easy Access Wiring Compartment
- Pre-wired with Cord
- Die Cast Aluminum Housing
- Suitable for Ground Mounting
- Hinged Face Frame
- Lamp Included



Listed for Wet Locations

175 to 400 watts MH | HPS | PS



### ORDERING INFORMATION

Catalog #	Description	Volts	Ballast Type	Lamp
<b>METAL HALIDE</b>				
FLDX-175MHQPK	175 watt MH	Quad V	CWA	MH175/U
FLDX-250MHQPK	250 watt MH	Quad V	CWA	MH250/U
FLDX-400MHQPK	400 watt MH	Quad V	CWA	MH400/U
<b>HIGH PRESSURE SODIUM</b>				
FLDX-250HQPK	250 watt HPS	Quad V	CWA	C250S50
FLDX-400HQPK	400 watt HPS	Quad V	CWA	C400S51
<b>PULSE START</b>				
FLDX-320PQPK	320 watt PS	Quad V	CWA	MS320/H
FLDX-350PQPK	350 watt PS	Quad V	CWA	MS350/H
FLDX-400PQPK	400 watt PS	Quad V	CWA	MS400/H

480V / 5 Tap Available Upon Request

### DIMENSIONS

Approx. Weight: 29 lbs.

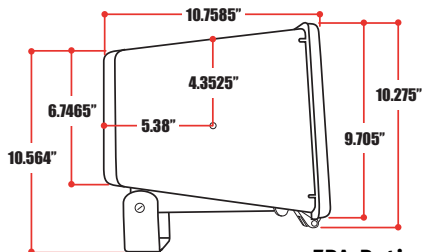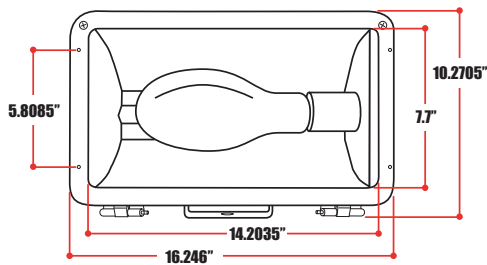


EPA Rating: 1.1

### ACCESSORIES (FIELD INSTALLED)

Catalog #	Description	Finish	Std. Pkg.	See Pg.#
320-001	Glare Shield for FLDX	Bronze	1	79
320-002	Wireguard for FLDX	—	1	79
320-003	Slipfitter for FLDX	Bronze	1	79
320-004	Large Trunion for FLDX	Bronze	1	79
210-002	Face Frame Assembly for FLDX	Bronze	1	79

### MOUNTING DETAIL

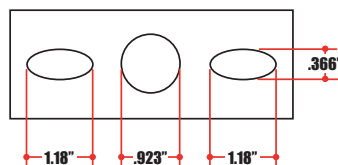

### PHOTOMETRICS

400W MH @ 25' Mounting Height  
and Aimed 45° below horizontal

