


347Vac 26w to 32W Fluorescent Spec's

(SINGLE LAMP 'H' PROFILE PROGRAMMED RAPID START)

INPUT	PS30E62H
● Lamp Wattage	26/32W
● Vac	347 V
● Amps @ 347Vac	0.097A @ 32W
● Watts @ 347Vac	28W@26W Lamp 34W@32W Lamp
● Frequency	50/60Hz
● THD	<12%
● Power Factor	>96%
● Transient Immunity ANSI 62.41 CAT.A	

OUTPUT ON ALL SINGLE LAMP MODELS	
● Lamp Drive Frequency	52kHz Sinusoidal
● Crest Factor ANSI C82.11	<1.4
● Pre-Heat Start	1 to 1.5 seconds
● UL Class 'P' Listed	Yes
● Ignition Failure Shutdown	Yes
● End of Lamp Life Protection	Yes

MECHANICAL / ENVIRONMENTAL for ENCLOSURE 'H'	
● 'H' Enclosure Overall Dimensions	3.34" L x 2.93" W x 1.35" H
● Unit Weight	6 oz.
● Minimum Operating Temperature	Min. Enclosure Temp -20°C
● Maximum Operating Temperature	Max. Enclosure Temp 90°C
● EMI / RFI Compliance	FCC 47 CFR Part 18
● Sound Rating	Rated 'A'
● UL / CUL Listed	File #E201562
● All Wires are UL 1015 18ga. Solid, 9 inches in length.	
● Chassis material is 0.040" Gray Anodized Aluminum..	

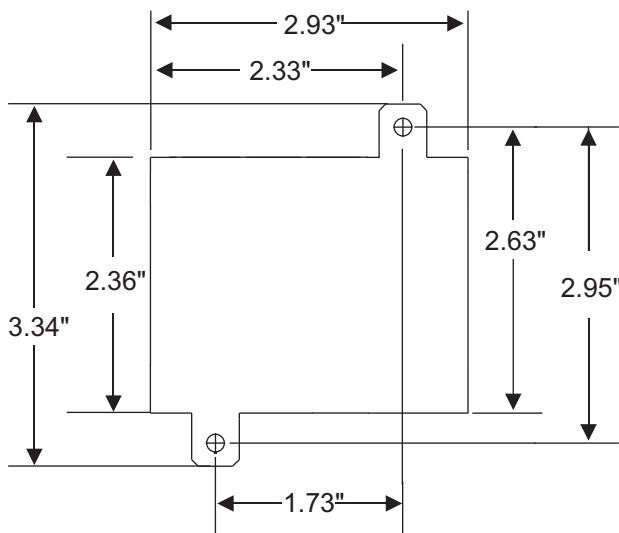

Ballast Wiring Diagram

