


T5

High Output

ELECTRONIC FLUORESCENT BALLASTS


Lamp Type			Input Volts	Product Number	Product Code	Certifications			Line Current (Amps)	Input Power (Watts)	Power Factor	Ballast Factor	THD %	Min Start Temp	Sound Rating	Wire Diag.	Case Dim.	Spec Page
Qty	Watts	Start Type				UL	cUL	CSA										
F24T5/HO																		
1	24	RS	120	50138	E139HO/RS/120	X	X	0.41	28	0.55	1.00	<135	0°F	A	1-7	G1	62	
	24	PS	120	50142	EP239HO/PS/MV	X	X	0.25	29	0.98	1.12	<15	0°F	A	1-10	J1	69	
	24	PS	277	50142	EP239HO/PS/MV	X	X	0.12	29	0.98	1.12	<15	0°F	A	1-10	J1	69	
2	24	PS	120	50142	EP239HO/PS/MV	X	X	0.47	55	0.98	1.10	<10	0°F	A	2-8	J1	69	
	24	PS	277	50142	EP239HO/PS/MV	X	X	0.21	55	0.98	1.10	<10	0°F	A	2-8	J1	69	
F39T5/HO																		
1	39	RS	120	50138	E139HO/RS/120	X	X	0.49	35	0.57	0.88	<120	0°F	A	1-7	G1	62	
	39	PS	120	50142	EP239HO/PS/MV	X	X	0.36	43	0.98	1.02	<10	0°F	A	1-10	J1	69	
	39	PS	277	50142	EP239HO/PS/MV	X	X	0.16	43	0.98	1.02	<10	0°F	A	1-10	J1	69	
2	39	PS	120	50142	EP239HO/PS/MV	X	X	0.73	87	0.98	1.00	<10	0°F	A	2-8	J1	69	
	39	PS	277	50142	EP239HO/PS/MV	X	X	0.31	85	0.98	1.00	<10	0°F	A	2-8	J1	69	
F54T5/HO																		
1	54	RS	120	50140	E154HO/RS/120	X	X	0.74	51	0.56	0.95	<140	0°F	A	1-7	G1	63	
	54	PS	120	50144	EP254HO/PS/MV	X	X	0.52	62	0.96	1.02	<15	0°F	A	1-10	J1	71	
	54	PS	277	50144	EP254HO/PS/MV	X	X	0.23	62	0.96	1.02	<15	0°F	A	1-10	J1	71	
2	54	PS	120	50144	EP254HO/PS/MV	X	X	1.00	120	0.98	1.00	<10	0°F	A	2-8	J1	71	
	54	PS	277	50144	EP254HO/PS/MV	X	X	0.43	117	0.98	1.00	<10	0°F	A	2-8	J1	71	

Case Diagrams

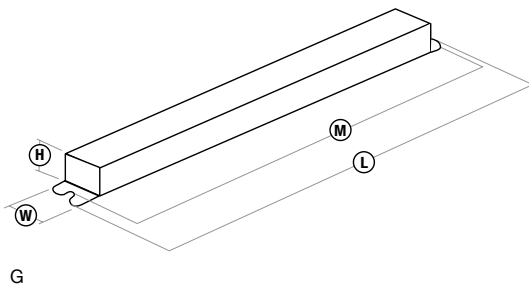


Case Dimensions


Drawing #	Overall (L)	Width (W)	Height (H)	Mounting (M)
G1	9.10"	0.95"	0.95"	8.75"
J1	16.90"	1.20"	1.00"	16.00"

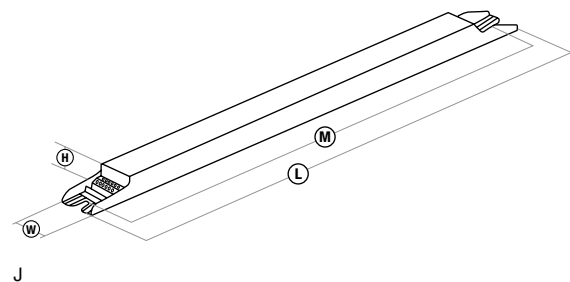


Wiring Diagrams

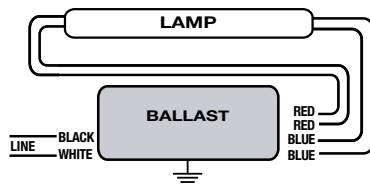

1-7

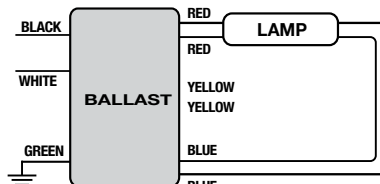

1-10

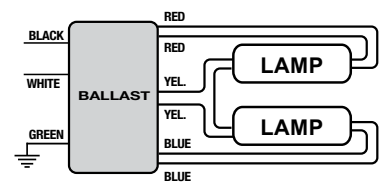

2-8

Atlas Lighting Supply

2828 S. Linwood St. Visalia, CA 93277
 Phone: 559-697-6764 Fax: 888-605-2324

www.atlaslightingsupply.com