

Atlas Lighting Supply
 2828 S. Linwood St
 Visalia, CA 93277
 Ph: 559-804-1664, F: 888-605-2324
 www.atlaslightingsupply.com

Model No. VE226MVHRP-C	
Family	Elite
Ballast Type	Electronic
Lamp Operation	Series
Input Voltage	120-277
Input Frequency	50/60 HZ
Starting Method	Programmed Start

PRODUCT SPECIFICATIONS

ELECTRONIC BALLAST

Lamp Type	No. of Lamps	Input Voltage (V)	Input Current (A)	Input Power (W)	Power Factor	MAX THD (%)	Ballast Factor	Min. Starting Temperature (°F/°C)	Lamp Current Crest Factor	B.E.F.
CFQ26W/G24q	2	120-277	0.48-0.21	58-56	0.98	10	0.97	0/-18	1.7	1.67-1.73
CFQ26W/G24q	1	120-277	0.25-0.11	30	0.98	10	1.00	0/-18	1.7	3.33
CFTR26W/GX24q	2	120-277	0.48-0.21	58-56	0.98	10	0.97	0/-18	1.7	1.67-1.73
CFTR26W/GX24q	1	120-277	0.25-0.11	30	0.98	10	1.00	0/-18	1.7	3.33
CFTR32W/GX24q	1	120-277	0.31-0.13	36	0.98	10	0.98	0/-18	1.7	2.72
CFTR42W/GX24q	1	120-277	0.38-0.17	46	0.98	10	0.98	0/-18	1.7	2.33

Performance:

- Meets ANSI Standard C82.11-2005
- Meets ANSI Standard C62.41-2002
- Meets FCC18 Consumer Limits
- Type CC


Safety:

- No PCB's, Type HL
- UL and cUL Listed (Class P, Type 1 Outdoor)
- OCV 300V
- No-load: 5 Watt


Application:

- Remote Mounting: 18 ft. max. Lead length, 18AWG
- Maximum Ambient Temperature: 131°F, 55°C
- Sound Rated: A
- Maximum Case Temperature: 194°F, 90°C

Physical Parameters

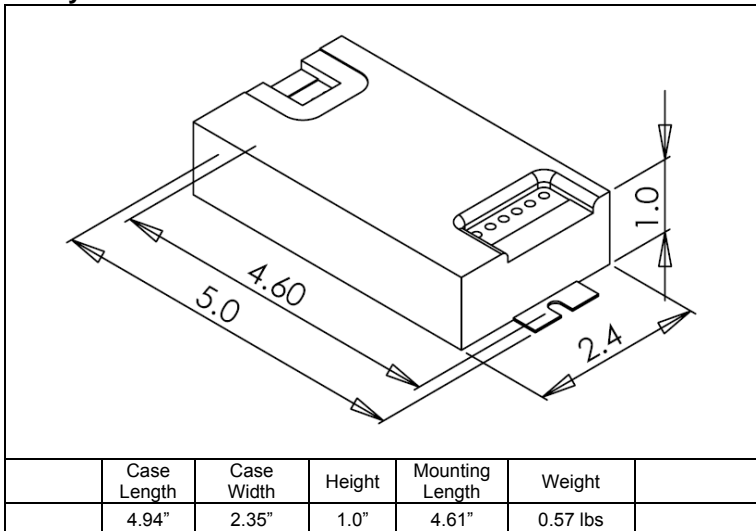

Wiring Diagram

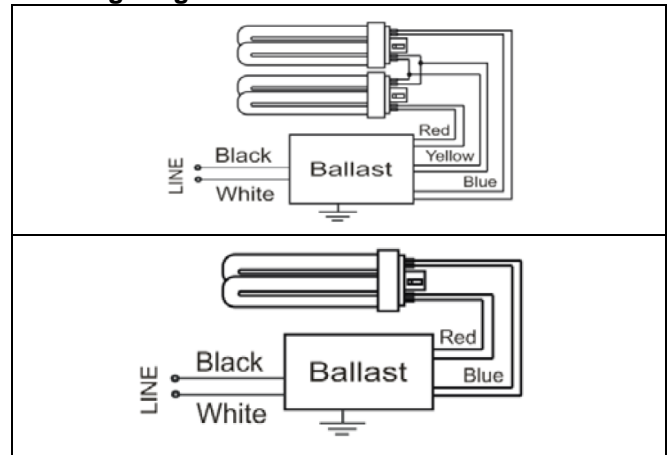

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.

