

[Return to Atlas Lighting Supply](#)



FEATURES

- Die Cast Aluminum Housing
- Borosilicate Glass Lens
- Hinged Face Frame
- Threaded Apertures for Conduit & Photo Control
- Lamp Included



Listed for Wet Locations

250 to 400 watts MH | HPS | PS



ORDERING INFORMATION

Catalog #	Description	Volts	Ballast Type	Lamp
METAL HALIDE				
WLXD-250MHQPK	250 watt MH	Quad V	CWA	MH250/U
WLXD-400MHQPK	400 watt MH	Quad V	CWA	MH400/U
HIGH PRESSURE SODIUM				
WLXD-250HQPK	250 watt HPS	Quad V	CWA	C250S50
WLXD-400HQPK	400 watt HPS	Quad V	CWA	C400S51
PULSE START				
WLXD-320PQPK	320 watt PS	Quad V	CWA	MS320/H
WLXD-350PQPK	350 watt PS	Quad V	CWA	MS350/H
WLXD-400PQPK	400 watt PS	Quad V	CWA	MS400/H

Add Suffix WT to Indicate White Housing 480V / 5 Tap Available Upon Request

DIMENSIONS


Approx. Weight: 32 lbs.

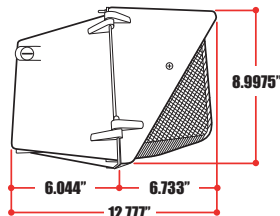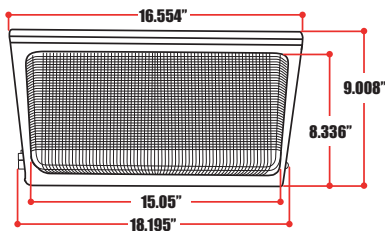

ACCESSORIES (FIELD INSTALLED)

Catalog #	Description	Finish	Std. Pkg.	See Pg.#
280-020-1	Wireguard for WLXD	—	1	90
280-023-1	Polycarbonate Guard for WLXD	—	1	90
320-015	Full Cut-Off Shield for WLXD	Bronze	1	90
320-015WT	Full Cut-Off Shield for WLXD	White	1	90
210-011	Face Frame Assembly for WLXD	Bronze	1	90
210-011WT	Face Frame Assembly for WLXD	White	1	90
230-002	Button 120V Photo Control	—	1	124
230-008	Button 208-277V Photo Control	—	1	124

MOUNTING DETAIL

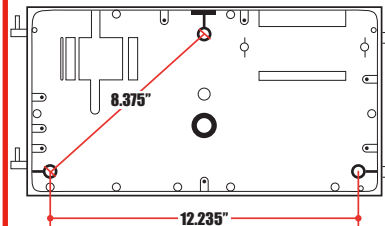

PHOTOMETRICS

400W MH @ 25' Mounting Height
Isofootcandles

