



**3 Year Warranty**

Catalog#	BB-0150HPC6RC
Type:	150W High Pressure Sodium
Voltage:	120V

**General Information**

Lamp Type	150W HPS
ANSI Designation	S55
Line Voltage(V)	120
Regulation	5%
Frequency(Hz)	60
Recommended Fuse(A)	15
Circuit Type	Reactor
Insulation Class	180°C
Capacitor Value	55 MF for HPF
Capacitor Voltage Rating	3000V
Cap.Temp.Rating	105°C
Winding Materials(Pri/Sec)	Al/Al
Lamp Starter	BI-801
Agency Certification	RU,cRU
Maximum Distance to Lamp	2FT

**Wiring Diagram**

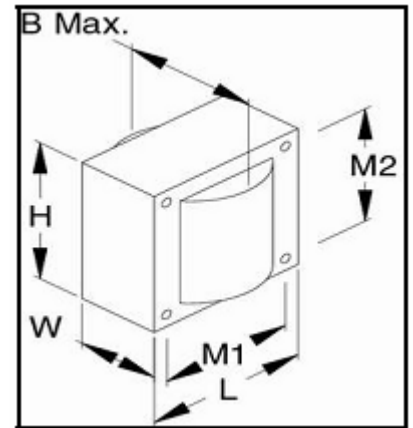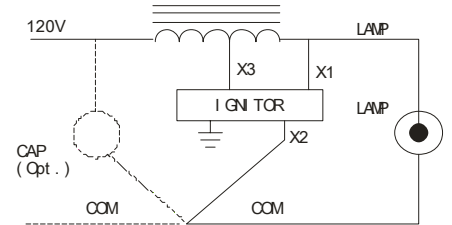

**Electrical Characteristics**

Line Volt (V)	Power Factor	Line Current (A)			Input Power (W)	Open Circuit Voltage (V)	Min Start Temp.	UL Temp. Code
		Operating	Open	Start				
120	NPF	2.35	NA	4.50	163	120	-40°C	F

**Physical Characteristics**

Overall Dimensions (Inches)				Mounting Holes (Inches)			Bracket Dimension (Inches)		Ballast Net Weight (KG)	Lead Length (Inches)
Length	Width	Height	B max.	Diameter	M1	M2	Length	Width		
2.64	2.24	2.25	3.35	0.203	2.19	1.79	-	-	1.357	12-14

**Atlas Lighting Supply**

2828 S. Linwood St. Visalia, CA 93277  
 Phone: 559-697-6764 Fax: 888-605-2324  
[www.atlaslightingsupply.com](http://www.atlaslightingsupply.com)